



同步交流电机
AC Asynchronous Gear Motor
49TYD-375-2


电机参数 MOTOR DATA

额定电压	Voltage	V	12	24	110	220
额定频率	Power Frequency	Hz	50/60			
输入功率	Input Power	W	≤ 5	≤ 5	≤ 5	≤ 5
输入电流	Input Current	mA	≤ 420	≤ 220	≤ 50	≤ 25
旋转方向	Rotation		CW/CCW			
温升	Coil temperature Rise	K	≤ 45			
绝缘等级	Insulation Class		B			
绝缘强度	Insulation Strength		AC1500/50Hz/min			
电容	Capacitor		40μF/63V	10μF/63V	0.47μF/250V	0.15μF/450V

扭矩表 TORQUE SHEET

输出转速 (Output Speed)	r/min	1	1.5	2	2.5	3.2	4	5	8	10	15	16	20	25	30
输出扭矩 (Output Torque)	Kgf.cm	20	20	20	18	14	11	9	5.6	4.5	3	2.8	2.2	1.8	1.5

外形图 DIMENSION

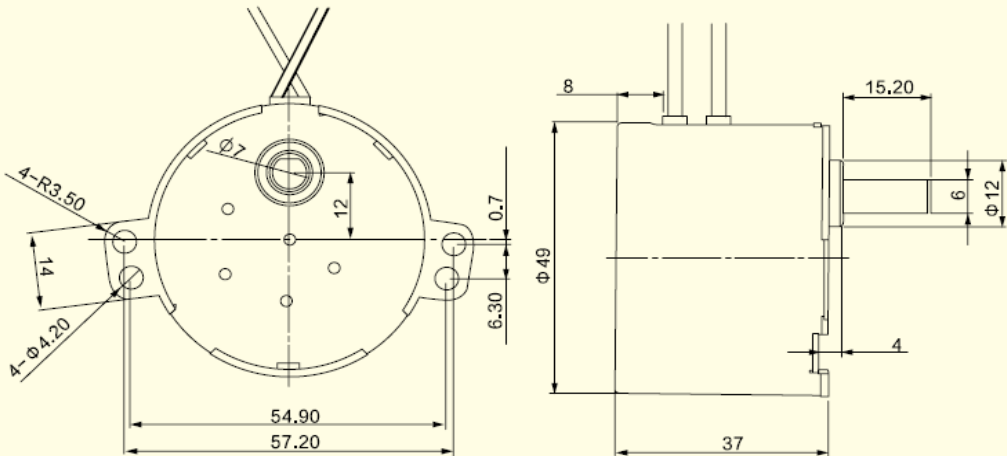

主要用途：室内外监控器、舞台灯光、
电动广告台、医疗器械、
塑封机及自动控制设备等。

Application:household electrical appliances/
laminator/auto control machine/
spotlight/..etc.