

同步交流电机
AC Asynchronous Gear Motor
60TYD-A




电机参数 MOTOR DATA

额定电压	Voltage	V	24	110	220-240	24	110	220-240
额定频率	Power Frequency	Hz	50/60			50/60		
输入功率	Input Power	W	< 17			< 25		
输入电流	Input Current	A	< 0.63	< 0.14	< 0.07	< 1.2	< 0.3	< 0.15
旋转方向	Rotation		CW/CCW(Reversible)			CW/CCW(Reversible)		
工作温度	Operating Temperature	℃	-15~40			-15~40		
温升	Coil temperature Rise	K	< 80			< 80		
绝缘等级	Insulation Class		B			B		
绝缘强度	Insulation Strength		AC1500/50Hz/min			AC1500/50Hz/min		
电容	Capacitor		47μF/63V	2.2μF/250V	0.56μF/450V	57μF/63V	2.8μF/250V	0.68μF/450V
工件制类型	Duty type		S1 Continus			S2(30min)		

扭矩表 TORQUE SHEET

输出转速 (Output Speed)	r/min		2.5	5	8	10	15	20	25	30	40	60	75	99	115	128	136
输出转矩 (Output Torque)	Kgf.cm	S1	40	40	40	30	20	15	12	10	7.5	5	4	3	2.5	2	1.5
		S2	40	40	40	40	30	23	18	15	11	7	5.5	4	3.5	3	2.5

外形图 DIMENSION

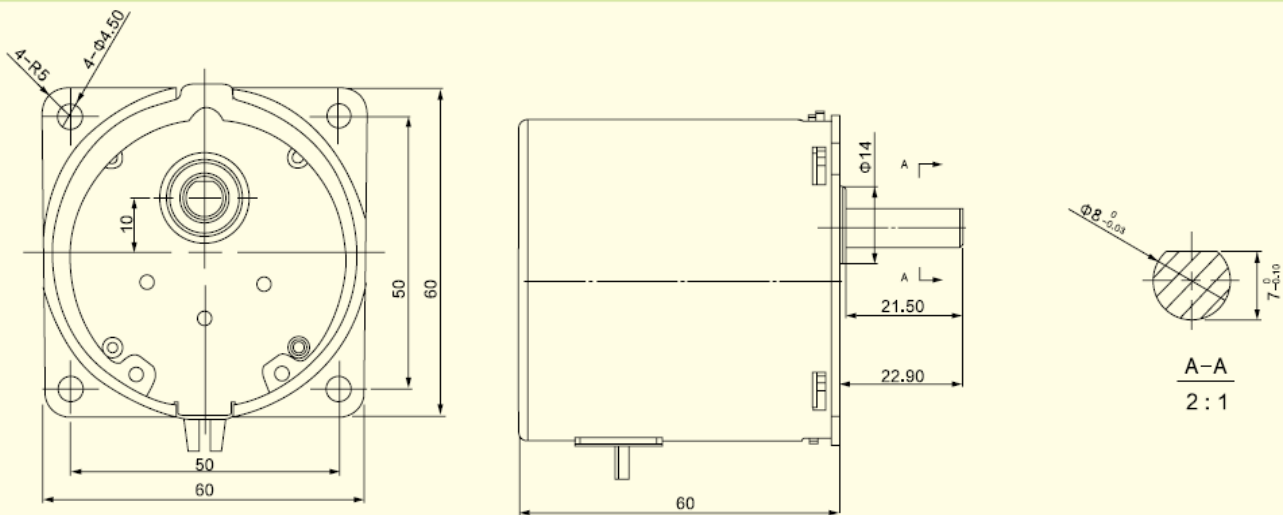

主要用途：室内外云台、电动窗帘、塑封机、医疗设备及全自动化仪器仪表等。
Application:Laminator/outdoor auto control machine/monitor..etc.