



同步交流电机

AC Asynchronous Gear Motor
60TYD-B


电机参数 MOTOR DATA

额定电压	Voltage	V	24	110	220-240	24	110	220-240
额定频率	Power Frequency	Hz	50/60			50/60		
输入功率	Input Power	W	< 17			< 25		
输入电流	Input Current	A	< 0.65	< 0.15	< 0.08	< 1.5	< 0.35	< 0.2
旋转方向	Rotation		CW/CCW(Reversible)			CW/CCW(Reversible)		
工作温度	Operating Temperature	°C	-15~40			-15~40		
温升	Coil temperature Rise	K	< 80			< 80		
绝缘等级	Insulation Class		B			B		
绝缘强度	Insulation Strength		AC1500/50Hz/min			AC1500/50Hz/min		
电容	Capacitor		47μF/63V	2.2μF/250V	0.56μF/450V	67μF/63V	3.0μF/250V	0.8μF/450V
工件制类型	Duty type		S1 Continus			S2(30min)		

扭矩表 TORQUE SHEET

输出转速 (Output Speed)	r/min		2.5	5	8	10	15	20	25	30	40	60	75	99	115	128	136
输出转矩 (Output Torque)	Kgf.cm	S1	40	40	40	40	29	22	18	15	11	7	6	4	3.5	3	2.5
		S2					40	30	24	20	15	10	8	6	5	4.5	4

外形图 DIMENSION

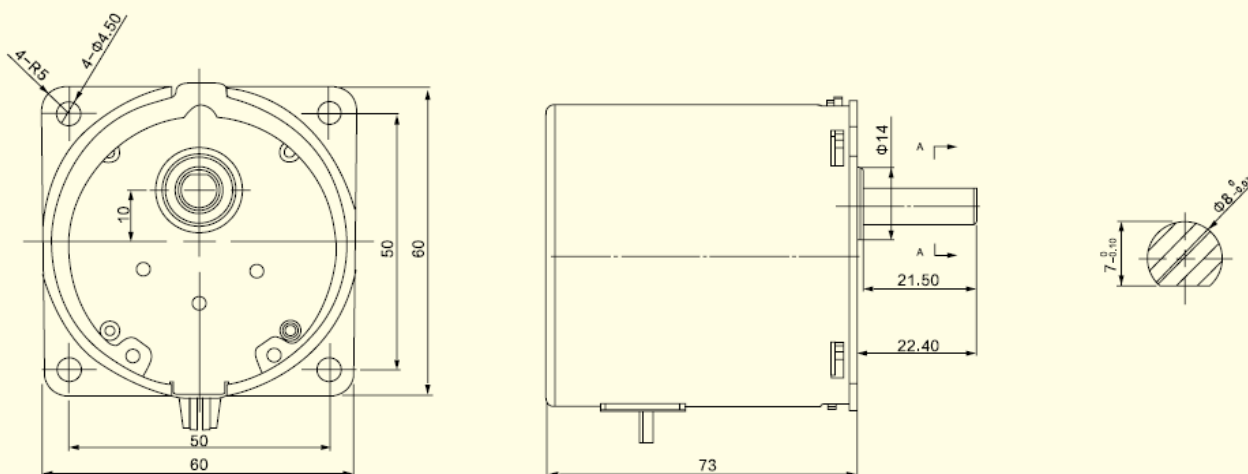

主要用途：室内外云台、电动窗帘、塑封机、医疗设备及全自动化仪器仪表等。

Application:Laminator/outdoor auto control machine/monitor..etc.