


◆ 2.2KW


CH-40-2200-3~40

轻负载缩框型 CH-40-2200-50~80

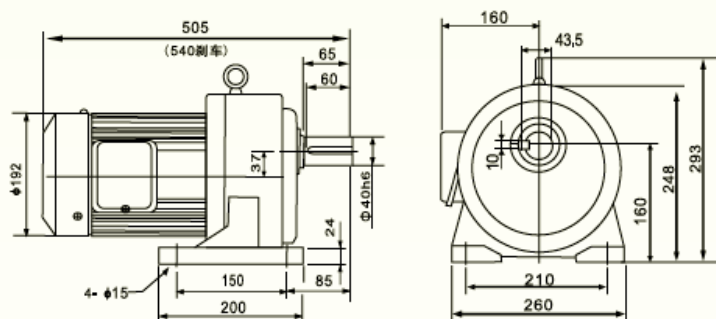

CH-50-2200-50~100

轻负载缩框型 CH-50-2200-110~200

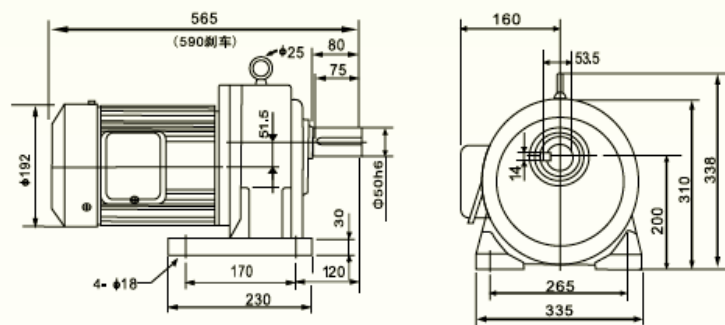

电机输出扭矩表 / 2.2KW Motor Output Torque Data Sheet

减速比 (GEAR RATIO)		3	5	10	15	20	25	30	40	45	50	60	70	80	90	100
输出转速 OUTPUT SPEED(RPM)	50Hz	500	300	150	100	75	60	50	37	33	30	25	21	19	17	15
	60Hz	600	360	180	120	90	72	60	45	40	36	30	25	23	20	18
输出扭矩 OUTPUT TORQUE(N·m)	50Hz	3.80	6.72	13.7	20.1	26.8	33.6	40.3	52.0	59.8	65.1	78.1	92.5	105	113	126
	60Hz	3.20	5.6	11.2	16.8	22.4	28.0	33.6	43.4	49.6	54.3	65.1	77.1	87.5	94.3	105